



Size:
1.25 x 0.80 x 0.40 inches
(31.8 x 20.3 x 10.2 mm)

Applications:

- Medical Equipment
- Telecom/Datacom
- Industry Control Systems
- Semiconductor Equipment
- PV Power Systems
- IGBT Gate Drivers

FEATURES

- 2µA Patient Leakage Current
- Single & Dual Outputs
- Under Voltage Protection
- High Efficiency up to 89%
- 2:1 Wide Input Voltage Ranges
- Built-in EMI Class A Filter
- Low Stand-by Power Consumption
- Up to 10 Watts Output Power
- Reinforced Insulation for 300VAC Working Voltage
- Clearance and Creepage Distance: 6.6mm/2MOOP
- 3000VAC Input to Output 2MOOP Isolation
- Short Circuit, Over Voltage, and Over Load Protection
- CE Marked
- Compliant to RoHS II & REACH
- ANSI/AAMI ES60601-1, EN60601-1, IEC60601-1 3rd Edition, UL60950-1, EN60950-1 & IEC60950-1 Safety Approvals
- Optional Remote ON/OFF Control and Trim Pin

DESCRIPTION

The DCMOP10 series of medical DC/DC power converters provides up to 10 Watts of output power in a 1.25" x 0.80" x 0.40" DIP package. This series consists of single and dual output models with 2:1 wide input voltage ranges of 4.5-9VDC, 9-18VDC, 18-36VDC, and 36-75VDC. Some features include high efficiency up to 89%, 3000VDC I/O (2 MOOP) isolation, and low stand-by power consumption. These converters are also protected against under voltage, short circuit, over voltage, and over load conditions. All models are RoHS compliant and have ANSI/AAMI ES60601-1, EN60601-1, IEC60601-1 3rd Edition, UL60950-1, EN60950-1, and IEC60950-1 safety approvals. Remote ON/OFF and Trim functions are also available for this series.

MODEL SELECTION TABLE

SINGLE OUTPUT MODELS

Model Number (1)	Input Voltage Range	Output Voltage	Output Current	Output Ripple & Noise	No Load Input Current	Output Power	Efficiency	Maximum Capacitive Load
DCMOP10-5S33x	5 VDC (4.5 - 9 VDC)	3.3 VDC	2500mA	30mVp-p	10mA	8.25W	80%	3000µF
DCMOP10-5S05x		5 VDC	2000mA	30mVp-p	10mA	10W	84%	2500µF
DCMOP10-5S12x		12 VDC	830mA	40mVp-p	20mA	10W	86.5%	430µF
DCMOP10-5S15x		15 VDC	670mA	40mVp-p	20mA	10W	87%	350µF
DCMOP10-5S24x	12 VDC (9 - 18 VDC)	24 VDC	416mA	50mVp-p	20mA	10W	85.5%	125µF
DCMOP10-12S33x		3.3 VDC	2500mA	30mVp-p	10mA	8.25W	83%	3000µF
DCMOP10-12S05x		5 VDC	2000mA	30mVp-p	10mA	10W	85.5%	2500µF
DCMOP10-12S12x		12 VDC	830mA	40mVp-p	10mA	10W	88%	430µF
DCMOP10-12S15x	24 VDC (18 - 36 VDC)	15 VDC	670mA	40mVp-p	10mA	10W	89%	350µF
DCMOP10-12S24x		24 VDC	416mA	50mVp-p	10mA	10W	89%	125µF
DCMOP10-24S33x		3.3 VDC	2500mA	30mVp-p	6mA	8.25W	83%	3000µF
DCMOP10-24S05x		5 VDC	2000mA	30mVp-p	6mA	10W	86.5%	2500µF
DCMOP10-24S12x	48 VDC (36 - 75 VDC)	12 VDC	830mA	40mVp-p	6mA	10W	89%	430µF
DCMOP10-24S15x		15 VDC	670mA	40mVp-p	6mA	10W	89%	350µF
DCMOP10-24S24x		24 VDC	416mA	50mVp-p	6mA	10W	89%	125µF
DCMOP10-48S33x		3.3 VDC	2500mA	30mVp-p	4mA	8.25W	82.5%	3000µF
DCMOP10-48S05x	5 VDC	5 VDC	2000mA	30mVp-p	4mA	10W	86.5%	2500µF
DCMOP10-48S12x		12 VDC	830mA	40mVp-p	4mA	10W	89%	430µF
DCMOP10-48S15x		15 VDC	670mA	40mVp-p	4mA	10W	89%	350µF
DCMOP10-48S24x		24 VDC	416mA	50mVp-p	4mA	10W	88.5%	125µF

DUAL OUTPUT MODELS

Model Number (1)	Input Voltage Range	Output Voltage	Output Current	Output Ripple & Noise	No Load Input Current	Output Power	Efficiency	Maximum Capacitive Load
DCMOP10-5D05x	5 VDC (4.5 - 9 VDC)	±5 VDC	±1000mA	30mVp-p	25mA	10W	83%	±1440µF
DCMOP10-5D12x		±12 VDC	±416mA	40mVp-p	25mA	10W	85.5%	±250µF
DCMOP10-5D15x		±15 VDC	±333mA	40mVp-p	25mA	10W	86.5%	±180µF
DCMOP10-12D05x	12 VDC (9 - 18 VDC)	±5 VDC	±1000mA	30mVp-p	10mA	10W	84%	±1440µF
DCMOP10-12D12x		±12 VDC	±416mA	40mVp-p	10mA	10W	89%	±250µF
DCMOP10-12D15x		±15 VDC	±333mA	40mVp-p	10mA	10W	88%	±180µF
DCMOP10-24D05x	24 VDC (18 - 36 VDC)	±5 VDC	±1000mA	30mVp-p	6mA	10W	85%	±1440µF
DCMOP10-24D12x		±12 VDC	±416mA	40mVp-p	6mA	10W	89%	±250µF
DCMOP10-24D15x		±15 VDC	±333mA	40mVp-p	6mA	10W	88%	±180µF
DCMOP10-48D05x	48 VDC (36 - 75 VDC)	±5 VDC	±1000mA	30mVp-p	4mA	10W	85%	±1440µF
DCMOP10-48D12x		±12 VDC	±416mA	40mVp-p	4mA	10W	88%	±250µF
DCMOP10-48D15x		±15 VDC	±333mA	40mVp-p	4mA	10W	88%	±180µF

SPECIFICATIONS: DCMOP10 SERIES

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS		Min	Typ	Max	Unit
INPUT SPECIFICATIONS						
Input Voltage Range	5VDC nominal input models		4.5	5	9	VDC
	12VDC nominal input models		9	12	18	
	24VDC nominal input models		18	24	36	
	48VDC nominal input models		36	48	75	
Start-Up Voltage	5VDC nominal input models				4.5	VDC
	12VDC nominal input models				9	
	24VDC nominal input models				18	
	48VDC nominal input models				36	
Shutdown Voltage	5VDC nominal input models			4		VDC
	12VDC nominal input models			8		
	24VDC nominal input models			16		
	48VDC nominal input models			33		
Input Surge Voltage (3sec, max.)	5VDC nominal input models				16	VDC
	12VDC nominal input models				25	
	24VDC nominal input models				50	
	48VDC nominal input models				100	
Input Current	No Load		See Table			
Input Filter			Pi type			
Remote ON/OFF Control <i>(Only for "B" type pin connection models)</i>	Referenced to -INPUT pin	DC/DC ON	Open or 0 ~ 1.2VDC			
		DC/DC OFF	2.2 ~ 12 VDC			
Input Current of CTRL Pin	Nominal Vin		-0.5		1	mA
Remote OFF Input Current	Nominal Vin			2.5		mA
OUTPUT SPECIFICATIONS						
Output Voltage			See Table			
Voltage Accuracy			-1.0		+1.0	%
Line Regulation	Low line to high line at full load	Single Output Models	-0.2		+0.2	%
		Dual Output Models	-0.5		+0.5	%
Load Regulation	No load to full load	Single Output Models	-0.2		+0.2	%
		Dual Output Models	-1.0		+1.0	%
Cross Regulation	Asymmetrical load 25%/100% FL	Dual Output Models	-5.0		+5.0	%
Voltage Adjustability <i>(Only for "B" type pin connection models)</i>	Single Output Models	3.3V, 5V, 12V Output Models	-10		+10	%
		15V, 24V Output Models	-10		+20	%
		Dual Output Models	±5V, ±12V, ±15V Output Models	-10		+10
Output Power			See Table			
Output Current			See Table			
Maximum Capacitive Load	Minimum input and constant resistive load		See Table			
Ripple & Noise (20MHz BW)	Measured with a 10µF/25V X7R MLCC		3.3V, 5V Output Models	30		mVp-p
	Measured with a 10µF/25V X7R MLCC		12V, 15V Output Models	40		
	Measured with a 4.7µF/50V X7R MLCC		24V Output Models	50		
Transient Response Recovery Time	25% load step change			250		µs
Start-Up Time	Constant resistive load	Power Up		30		ms
		Remote On/Off		30		
Temperature Coefficient			-0.02		+0.02	%/°C
PROTECTION						
Short Circuit Protection			Continuous, automatic recovery			
Over Load Protection	% of rated Iout; hiccup mode			150		%
Over Voltage Protection	Continuous clamp	Single Output Models	3.3V Output Models	3.7	5	VDC
			5V Output Models	5.6	7.0	
			12V Output Models	13.5	16	
		Dual Output Models	15V Outputs Models	18.3	22.0	
			24V Output Models	29.1	34.5	
				5.6	7.0	
			13.5	18.2		
			17.0	22.0		

SPECIFICATIONS: DCMOP10 SERIES

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
GENERAL SPECIFICATIONS					
Efficiency	Nominal input voltage and full load	See Table			
Switching Frequency		270	300	330	kHz
Isolation Voltage	1 minute	3000			VAC
Isolation Capacitance			12	17	pF
Leakage Current	240VAC, 60Hz			2	µA
Clearance/Creepage		6.6			mm
ENVIRONMENTAL SPECIFICATIONS					
Operating Ambient Temperature	Without derating	-40		+77	°C
	With derating	+77		+105	
Storage Temperature Range		-55		+125	°C
Thermal Impedance	Natural convection (20LFM)		18		°C/W
Relative Humidity		5		95	% RH
Thermal Shock		MIL-STD-810F			
Vibration		MIL-STD-810F			
MTBF	MIL-HDBK-217F Full Load	3,849,000 hours			
PHYSICAL SPECIFICATIONS					
Weight		0.48oz (14g)			
Dimensions (L x W x H)		1.25x0.80x0.40 inches (31.8x20.3x10.2mm)			
Case Material		Non-conductive black plastic			
Base Material		Non-conductive black plastic			
Potting Material		Silicon (UL94-V0)			
SAFETY & EMC CHARACTERISTICS					
Safety Approvals (pending)	ANSI/AAMI ES60601-1, IEC60601-1, EN60601-1, UL60950-1 ⁽⁶⁾ , EN60950-1, IEC60950-1				
EMI (See Note 2)	EN55011, EN55022, and FCC Part 18			Class A, Class B	
ESD	EN61000-4-2	Air ±8kV Contact ±6kV	Perf. Criteria A		
Radiated Immunity	EN61000-4-3	10 V/m	Perf. Criteria A		
Fast Transient (See Note 3)	EN61000-4-4	±2kV	Perf. Criteria A		
Surge (See Note 3)	EN61000-4-5	±2kV	Perf. Criteria A		
Conducted Immunity	EN61000-4-6	10 Vrms	Perf. Criteria A		
Power Frequency Magnetic Field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A		




NOTES

- The "x" in the model number represents the Pin Connection type. It can be "A" for pin connection type A or "B" for pin connection type B. See mechanical drawings on page 4 for more information.
- The DCMOP10 series meets EMI Class A without an external filter added. This series can only meet EMI Class B with external components added. Please contact factory for more information.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
 - For 5VDC nominal input models we recommend connecting an aluminum electrolytic capacitor (Nippon Chemi-con KY series, 1000µF/25V) and a reverse diode (Vishay V10P45) in parallel.
 - For 12VDC & 24VDC nominal input models we recommend connecting an aluminum electrolytic capacitor (Nippon Chemi-con KY series, 470µF/50V) in parallel.
 - For 48VDC nominal input models we recommend connecting an aluminum electrolytic capacitor (Nippon Chemi-con KY series, 330µF/100V) in parallel.
- Remote ON/OFF control is optional and is only available for "B" type pin connection models. To order the converter with remote ON/OFF add the suffix "-P" to the model number (Ex: DCMOP10-48S12B-P).
- Trim function is optional and is only available for "B" type pin connection models. To order the converter with Trim pin add the suffix "-T" to the model number (Ex: DCMOP10-48S12B-T).
- This product is Listed to applicable standards and requirements by UL.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


**Due to advances in technology, specifications subject to change without notice.*

CHARACTERISTIC CURVES

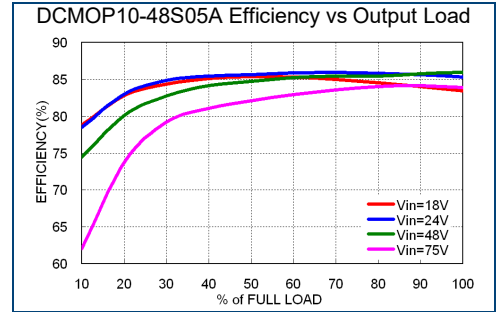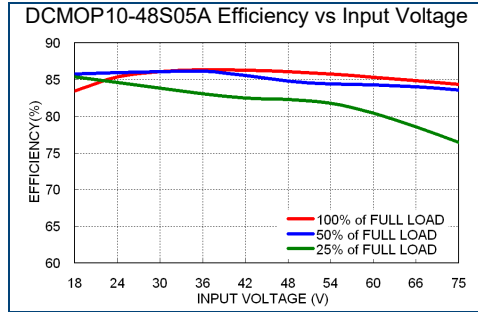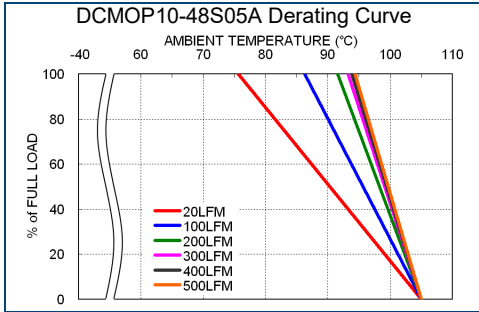

MECHANICAL DRAWINGS


A Type Pin Connection (Suffix "A")

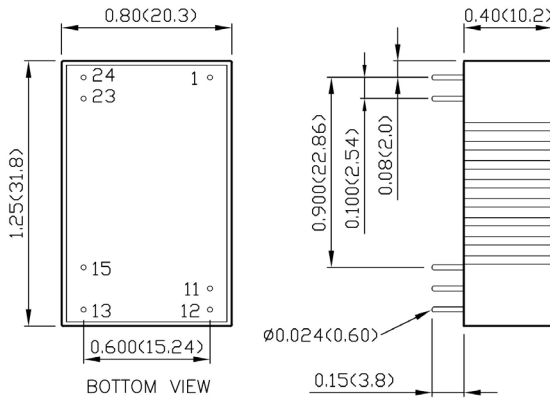

PIN CONNECTIONS		
PIN	SINGLE	DUAL
1	+INPUT	+INPUT
11	NO PIN	COMMON
12	-OUTPUT	NO PIN
13	+OUTPUT	-OUTPUT
15	NO PIN	+OUTPUT
23	-INPUT	-INPUT
24	-INPUT	-INPUT

- Dimensions in inch (mm)
- Tolerance: $x.xx \pm 0.02$ ($x.x \pm 0.5$)
 $x.xxx \pm 0.01$ ($x.xx \pm 0.25$)
- Pin Pitch Tolerance: ± 0.01 (0.25)
Pin Dimension Tolerance: ± 0.004 (0.1)

B Type Pin Connection (Suffix "B")

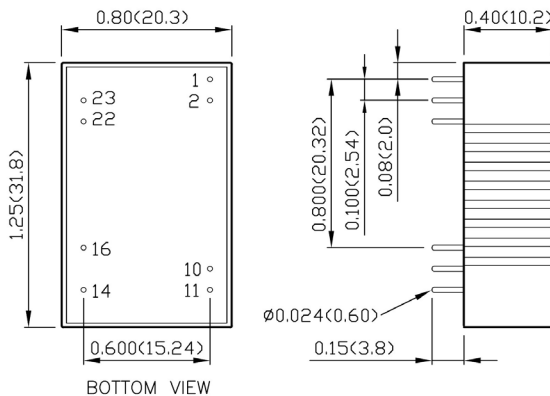


PIN CONNECTIONS		
PIN	SINGLE	DUAL
1	CTRL (Optional)	CTRL (Optional)
2	-INPUT	-INPUT
10	TRIM (Optional)	TRIM (Optional)
11	**NO PIN/NC	-OUTPUT
14	+OUTPUT	+OUTPUT
16	-OUTPUT	COMMON
22	+INPUT	+INPUT
23	+INPUT	+INPUT

**For single output models, Pin 11 is "NO PIN" with the trim pin option (Suffix "-T") and "NC" without the trim pin option.

- Dimensions in inch (mm)
- Tolerance: $x.xx \pm 0.02$ ($x.x \pm 0.5$)
 $x.xxx \pm 0.01$ ($x.xx \pm 0.25$)
- Pin Pitch Tolerance: ± 0.01 (0.25)
- Pin Dimension Tolerance: ± 0.004 (0.1)

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below. () for dual output trim



MODEL NUMBER SET

DCMOP	10	-	48	S	05	B	-	P (1)	T (1)
Series Name	Output Power		Input Voltage	Output Quantity	Output Voltage	Pin Connection		Remote ON/OFF Option	Trim Option
	10: 10 Watts		5: 5 VDC 12: 12 VDC 24: 24 VDC 48: 48 VDC	S: Single Output D: Dual Output	33: 3.3 VDC 05: 5 VDC 12: 12 VDC 15: 15 VDC 24: 24 VDC 05: ±5 VDC 12: ±12 VDC 15: ±15 VDC	A: A Type B: B Type		None: No Remote ON/OFF P: Remote ON/OFF	None : No Trim T: Trim

(1) Remote ON/OFF Control and Trim options are only available for "B" type pin connection models.

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300
 Toll Free: ☎(888)597-9255
 Fax: ☎(603)778-9797
 E-mail: sales@wallindustries.com
 Web: www.wallindustries.com
 Address: 37 Industrial Drive
 Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.